


SUN-FLEX® SCREENLITE

Enjoy
your
product

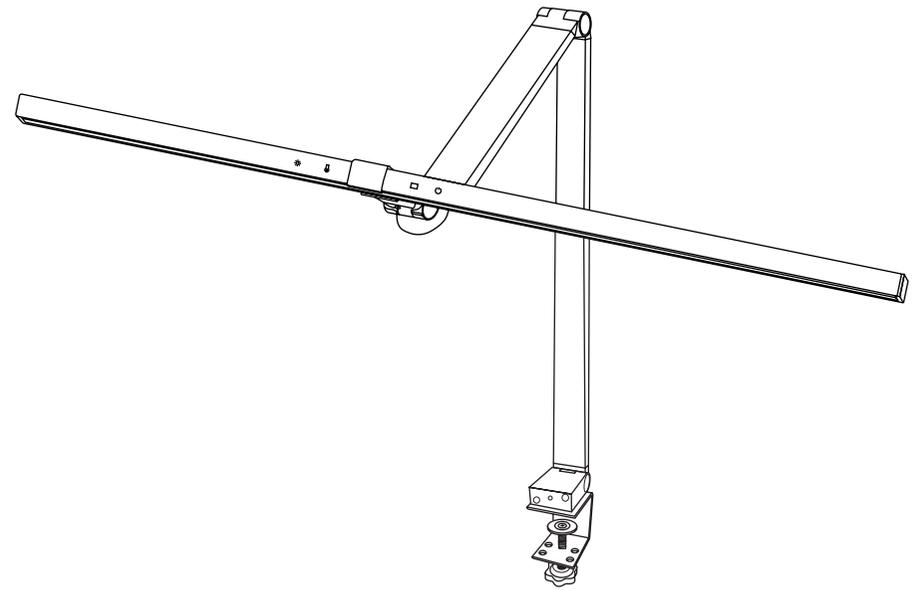

SUN-FLEX

www.sun-flex.com


4

www.sun-flex.com


1

Installation


① Install the light bar

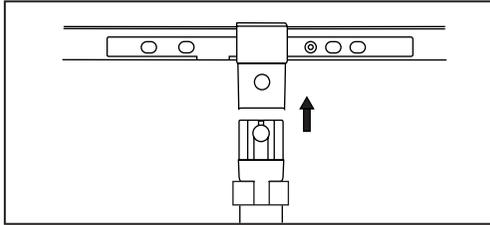

② Connect power

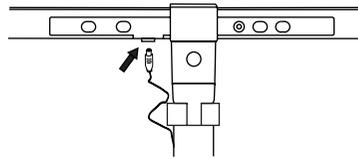


③ Uninstall the light bar

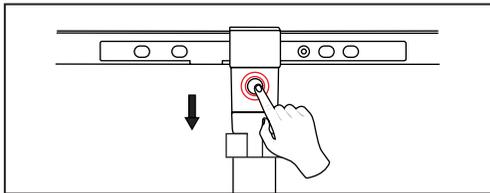


Install and uninstall the light bar as shown. Please push the button.

Parts & description

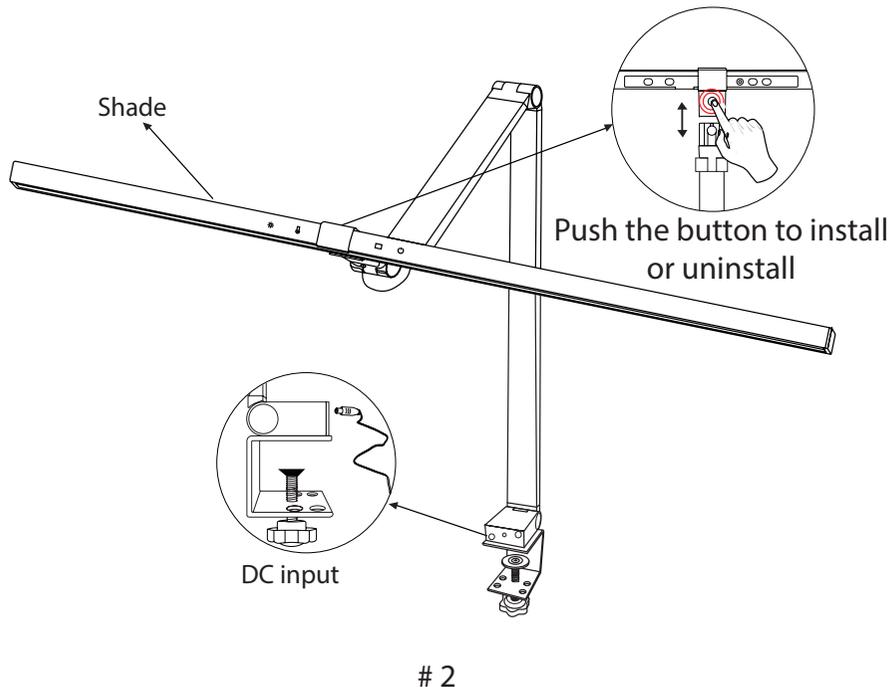

Operation

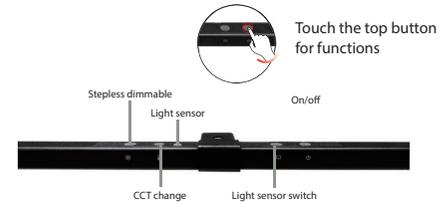

On/off: Touch to turn lamp on/off. Keep touching for 3 seconds to activate timer. Lamp will turn off automatically after 2 hours.

Light sensor: Press once to adjust the light automatically to the surroundings. When the indicator is blue, the function is on.


1. Touch once to turn the function on / off
 2. When the function is on, the lamp adjusts automatically:
 - If the surroundings become brighter, the lamp gradually becomes darker
 - If the surroundings become darker, the lamp gradually becomes brighter

3. To deactivate the function, there is two optional methods:
 - Touch the function button
 - or touch the dimmable button

CCT change: Touch the button once to change the color temperature in step from 3000-4000-5000-6500K; Keep touching the button to change the color temperature steplessly.

Dimmable: Touch the button once to adjust the brightness in step from 10%-25%-50%-70%-100%; Keep touching the button to adjust the brightness steplessly.

Measurement

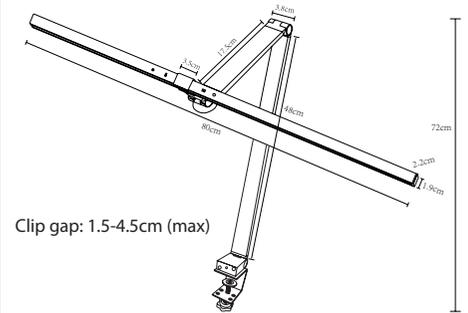

Specifications

WORKING HEIGHT	ILLUMINANCE (LUX)		
	6500K DAY LIGHT	4000K NEUTRAL LIGHT	3000K WARM LIGHT
30CM	2600LUX	2300LUX	2000LUX
40CM	1700LUX	1600LUX	1465LUX
45CM	1300LUX	1200LUX	1100LUX
50CM	1200LUX	1100LUX	1000LUX
57CM	950LUX	900LUX	800LUX
70CM	625LUX	575LUX	500LUX

- CCT setting: 3000/4000/6500K or stepless
- Dimmable: 10/20/50/70/100% or stepless
- Light source: Samsung LED
- Consumption: 12W
- Touch controls: Yes
- Surrounding light sensor: Yes
- Anti-glare diffuser: Yes
- Certificates: CE, RoHS
- Packaging: Single, 12 units in transportation
- Art.no.: 104105, SUN-FLEX®SCREENLITE, black (GTIN13: 7350042900756)

3